


THOUGHTFULLY DESIGNED CONCRETE COATINGS

Color Chart

POLY COLORANT

Combine KRETUS® Poly Colorant with clear Polyaspartic or Polyurethane.

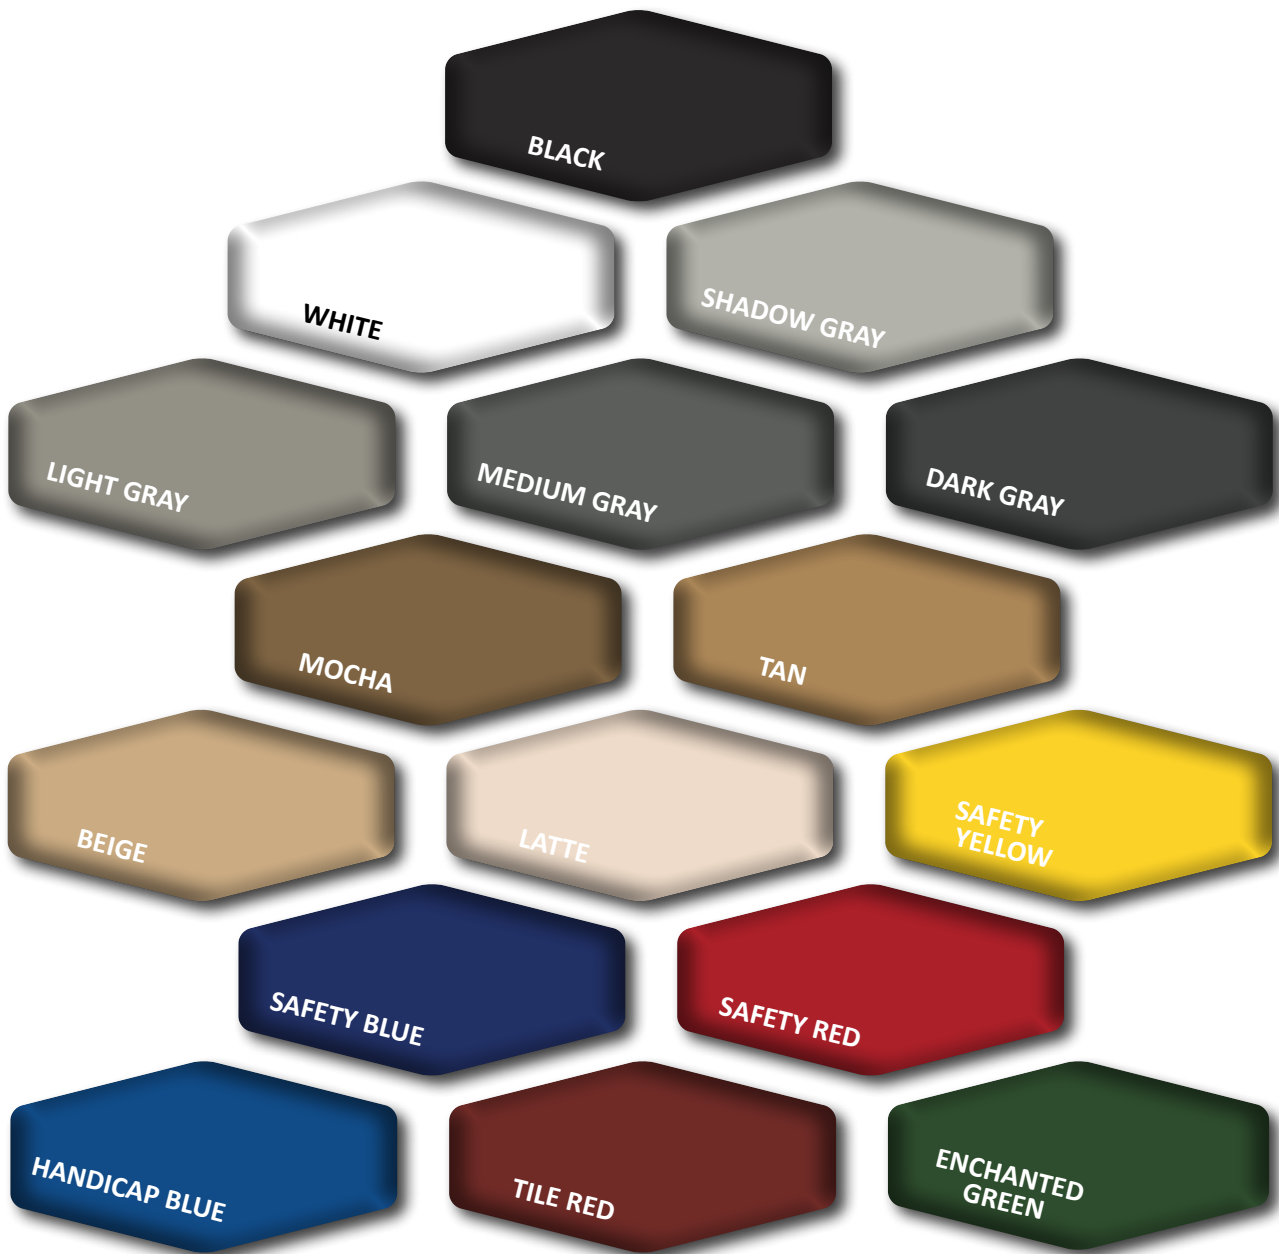

Colors shown are approximate. Resin and hardener selection, substrate, mix ratio, application technique, ambient temperature, and relative humidity may affect color. Sold as colorant packs only. To order a pre-blended color base or custom color, fill out KRETUS® Special Order form available at kretus.com/project-planning. Additional fees apply.

GENERAL MIXING GUIDE

Ensuring Uniform Color

Check that product batch numbers are the same. Different batch numbers can produce slight variance in color. If different batch numbers, box product together and blend thoroughly before mixing product with other components. Always test application on site.

To ensure color opacity, apply two coats of White, Safety Red, and Safety Yellow.

Mixing Application

Premeasure components before combining. Add Colorant to Part A and mix for 1-2 minutes or until color is uniform. Add Part B and mix for 1-2 minutes. Total mixing time = 3 minutes.

Mixing Ratio

PRODUCT	KIT SIZE	COLORANT	MIX RATIO (A:B:COLOR)
POLYURETHANE HP GLOSS	1.25 gal	16 oz	1 qt:1 gal:16 oz
	25 gal	2 gal, 64 oz	5 gal:20 gal:2 gal, 64 oz
	250 gal	25 gal	50 gal:200 gal:25 gal
POLYURETHANE HP SATIN	1.5 gal	16 oz	1/2 gal:1 gal:16 oz
	15 gal	1 gal, 32 oz	5 gal:10 gal:1 gal, 32 oz
	150 gal	12 gal, 64 oz	50 gal:100 gal:12 gal, 64 oz
POLYURETHANE HS	1.5 gal	16 oz	1 gal:1/2 gal:16 oz
	15 gal	1 gal, 32 oz	10 gal:5 gal:1 gal, 32 oz
	150 gal	12 gal, 64 oz	100 gal:50 gal:12 gal, 64 oz
POLYASPARTIC 72, 85, OR 92	2 gal	16 oz	1 gal:1 gal:16 oz
	10 gal	80 oz	5 gal:5 gal:80 oz
	100 gal	6 gal, 32 oz	100 gal:100 gal:6 gal, 32 oz
ALIPHATIC MC	1 gal	8 oz	1 gal coating:8 oz colorant
POLY PATCH	2 gal	16 oz	1 gal:1 gal:16 oz