



BUILD THE BEST

COLOR QUARTZ





Invite vibrant color into your living and working spaces with **KRETUS® Color Quartz Epoxy and UPC Systems**. Not just decorative, these systems are exceptionally durable, slip-resistant, hygienic, and easy to clean.


Where **KRETUS® Color Quartz Systems** go to work:

- industrial—warehouse, laboratory/clean room, production floor, pharmaceutical plant, water treatment facility
- maintenance—waste station, janitorial closet, boiler room
- automotive—garage, showroom, sales floor
- hospitality—pool area, kitchen, restroom, balcony, cafeteria
- animal facilities—veterinary clinic, animal shelter


Chemical and Stain Resistant

Whether protected by a coat of Polyaspartic, Polyurethane, Top Shelf® Epoxy, or UPC, **KRETUS® Color Quartz Systems** withstand most chemicals, food and alcohol spills, and automotive grease and oil.

Color Chart

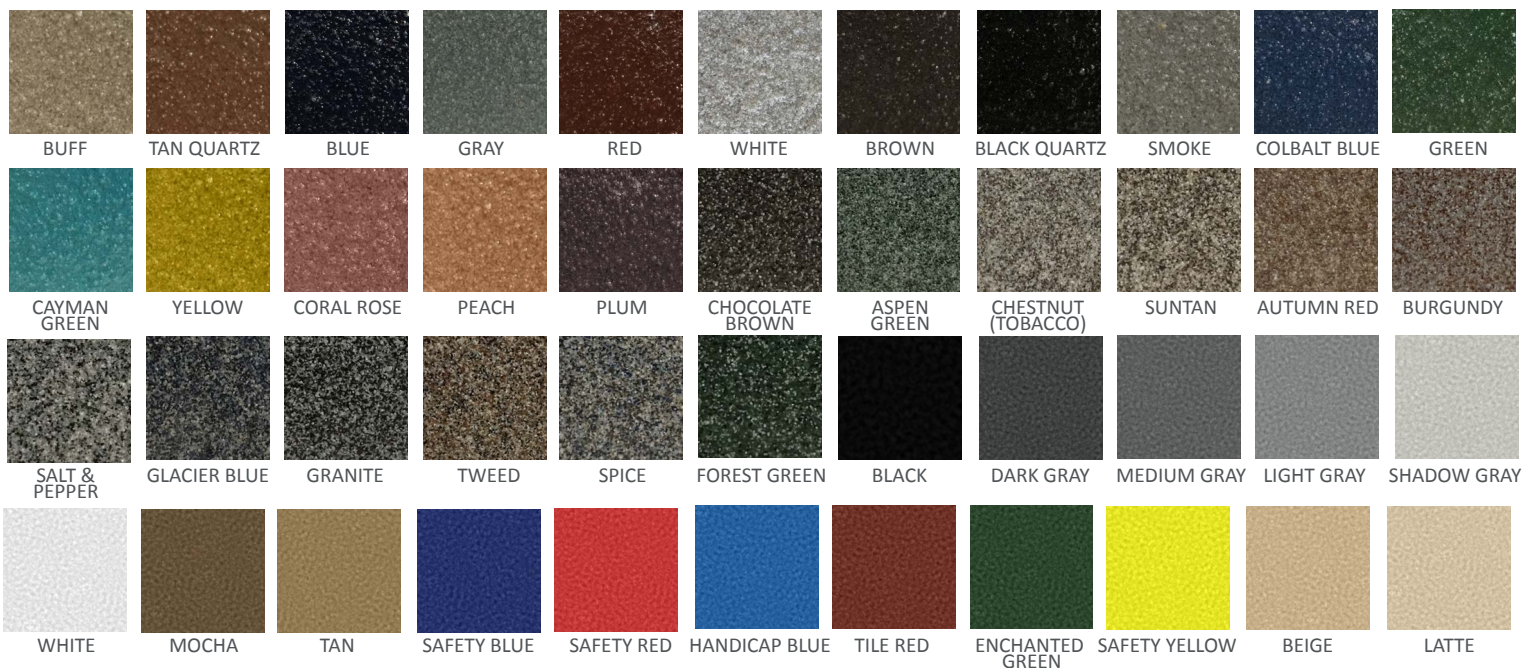


Not Available in Color Quartz Epoxy Systems:

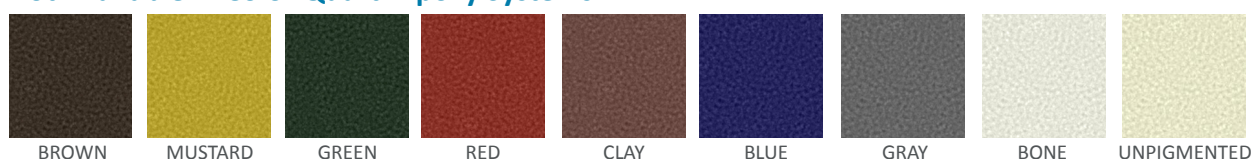

Colors shown are approximate.




EPOXY

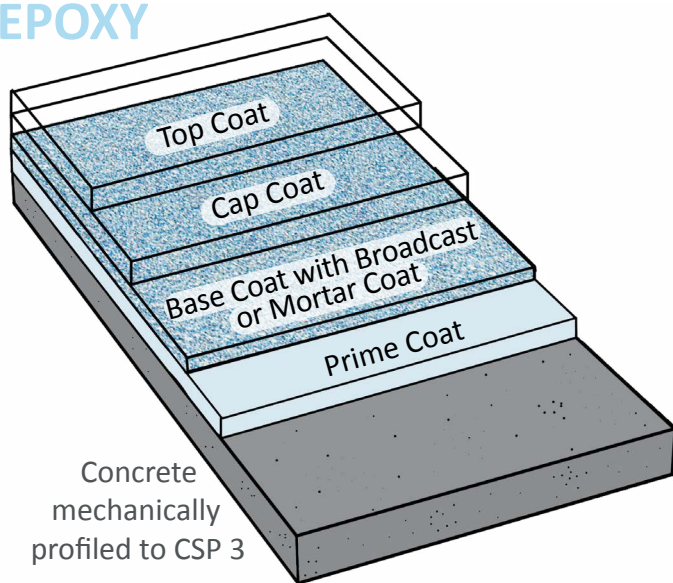

COLOR QUARTZ^{TS}

Traditional single-broadcast epoxy system at 1/8" thickness.

UPC

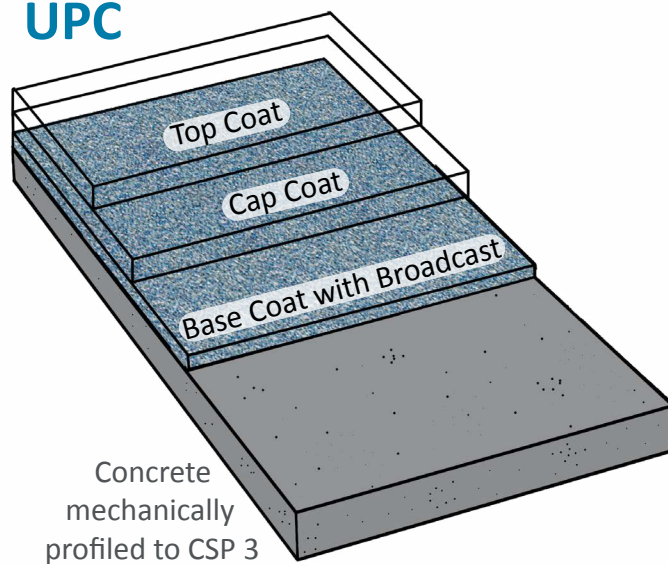

COLOR QUARTZ^{RC}

Urethane Polymer Concrete system at 1/8" thickness.

High-build Heavy-traffic Systems

COLOR QUARTZ^{DB}

Traditional double-broadcast epoxy system at 3/16" thickness.

COLOR QUARTZ^{SG}

Slurry-grade single-broadcast epoxy system at 3/16-1/4" thickness.

COLOR QUARTZ^{TG}

Trowel-grade epoxy mortar system at 1/4-3/8" thickness.

COLOR QUARTZ^{SL}

Self-leveling Urethane Polymer Concrete system at 3/16-1/4" thickness.

COLOR QUARTZ^{MF}

Medium-fill self-leveling Urethane Polymer Concrete system at 3/16-1/4" thickness.

COLOR QUARTZ^{TT}

Tight-trowel Urethane Polymer Concrete system at 1/4-3/8" thickness.

Low Maintenance

For daily cleaning, use KRETUS® Coating Cleaner or similar pH-neutral cleaning product.

For more information, visit kretus.com/color-quartz.

COLOR QUARTZ SYSTEMS BROCHURE



ADVANTAGES

USDA, FDA, EPA, SCAQMD, and VOC compliant
anti-microbial

EZ clean

green building

high-traffic tolerant

hot-tire resistant

scratch resistant

UV-resistant options

waterproofing



LIKE US ON SOCIAL MEDIA AND FOLLOW US ONLINE!

KRETUS GROUP® | kretus.com

1055 W. Struck Ave., Orange, CA 92867

DISCLAIMER: The information contained in this document is intended for use by KRETUS GROUP® qualified and trained professionals. This is not a legally binding document and does not release the specifier from his/her responsibility to apply materials correctly under the specific conditions of the construction site and the intended results of the construction process. The most current valid standards for testing and installation, acknowledged rules of technology, as well as KRETUS GROUP® technical guidelines must be adhered to at all times. Rev. 6/29/20